

GN 3500

GN Range: 100 kHz - 200 MHz / 3500 W CW



Prana GN 3500

- Class A solid state
- Broadband (instantaneous single band): 100 kHz – 200 MHz
- Frequency extension between 80 kHz to 250 MHz upon request (with limited specifications)
- Typical output power : 3500 W CW
- Linear output power (1 dB compression) guaranteed with harmonics <-20 dBc:
 - P1dB > 3000 W and H<-20 dBc up to 100 MHz and
 - P1dB > 1200 W and H<-20 dBc from 100 MHz to 200 MHz
- Air cooling: self contained fans
- Can operate in full mismatch conditions without damage
- Reliable, efficient and robust
- 22" Cabinet on wheels
- 3 years standard warranty

Maintenance

- Amplifier designed for minimal maintenance
 - Easy access to all parts
 - Modular design
 - Repairs with minimum adjustments
- Rapid diagnostic
- Minimal downtime
- Contract for preventive and corrective maintenance available

Applications

- EMC tests
- RF tests and instrumentation
- Radiocommunication
- Measurement and research laboratories

Versions

- GN 3500 DC amplifier with:
 - Multicolor LCD display with touch panel
 - Digital control
 - IEEE 488 GPIB, Ethernet, USB, RS232 Communications
 - Temperature controlled fans
 - Safety interlock
 - Integrated dual directional coupler
 - Display of instantaneous incident and reflected power


GN Range

- GN 40 => 40 W CW
- GN 500 => 500 W CW
- GN 1000 => 1000 W CW
- GN 2000 => 2000 W CW
- GN 3500 => 3500 W CW
- GN 7000 => 7000 W CW
- GN 12000 => 12000 W CW

Extra

- External coupler
- Bulk Current Injection + Calibration JIG
- RF Power cable
- Switching unit

GN3500 POWER AMPLIFIER 3500W / 100 KHz - 200MHz

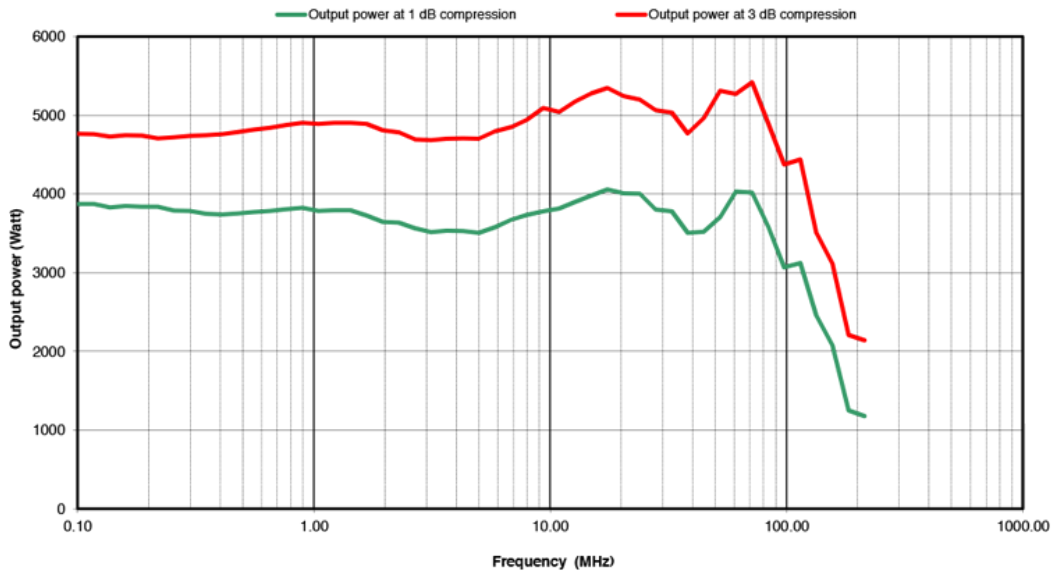

Specifications

Frequency bandwidth	100 kHz - 200 MHz (Frequency extension between 80 kHz to 250 MHz upon request)
Typical output power	3500 W
Power at 3 dB compression	3700 W min. up to 100 MHz / 2000 W min. from 100 MHz to 200 MHz
Power at 1 dB compression	3000 W min. up to 100 MHz / 1200 W min. from 100 MHz to 200 MHz
Harmonics distortion	H2,H3 < -20 dBc for the output power at 1 dB compression limit
Class type	Class A
Gain	65 dB
Linear power gain flatness	± 3 dB max
Mismatch tolerance	infinite without damage
Input impedance	50 ohms / VSWR: 2:1 max
Output impedance	50 ohms / VSWR: 2:1 max
Input power	+10 dBm max.
RF input connector	Type N fem. (front or rear panel) – other connector type on request
RF output connector	Type 7/16 fem. (front or rear panel) – other connector type on request
Integrated bidirectional power coupler	Coupling factor 69 dB typ.
Power coupling connector	Type N fem. (front or rear panel)
Safety interlock	Connector type BNC
Digital control	Transistors, power supplies, temperatures and fans
Mismatch protection	Self limitation for reflected power > 2000 W
Communication interface	Ethernet, USB, GPIB, RS232
Color LCD display with touch screen	Status, faults, direct and reverse instantaneous power
Ambient operating temperature	0 °C / + 35 °C
Room temperature storage	-20 °C / +70 °C
Cooling	Forced air with fan speed control: 480 l/sec max. (self contained fans)
Mains voltage	47-63 Hz, 3 phases (star or delta)
Rated current	15 kVA
Dimensions (W x D x H)	800 x 840 x 1590 mm (30U) / 31.5 x 33.1 x 62.6 in (30U)
Weight	390 kg / 858 lb