

# UX 180

UX Range: 2 GHz - 6 GHz / 180 W CW



## Prana UX 180

- Class A solid state
- Broadband (instantaneous single band): 2 GHz – 6 GHz
- Typical output power : 180 W CW
- Linear output power guaranteed with harmonics < -20 dBc
- Air cooling: self contained fans
- Can operate in full mismatch conditions without damage
- Reliable, efficient and robust
- 19" cabinet on wheels
- 3 years standard warranty
- Export license can be requested

## Maintenance

- Amplifier designed for minimal maintenance
  - Easy access to all parts
  - Modular design
  - Repairs with minimum adjustments
- Rapid diagnostic
- Minimal downtime
- Contract for preventive and corrective maintenance available

## Applications

- EMC tests
- RF tests and instrumentation
- Radiocommunication
- Measurement and research laboratories

## Versions

- UX 180 DC amplifier with:
  - Display
  - Digital control
  - IEEE 488 GPIB Communication
  - Integrated bidirectional coupler
  - display of instantaneous power

## UX Range


- UX 15 => 15 W CW
- UX 30 => 30 W CW
- UX 55 => 55 W CW
- UX 100 => 100 W CW
- UX 180 => 180 W CW

## Extra

- External coupler
- RF Power cable
- Switching unit



UX180 POWER AMPLIFIER 180W / 2 GHz - 6 GHz

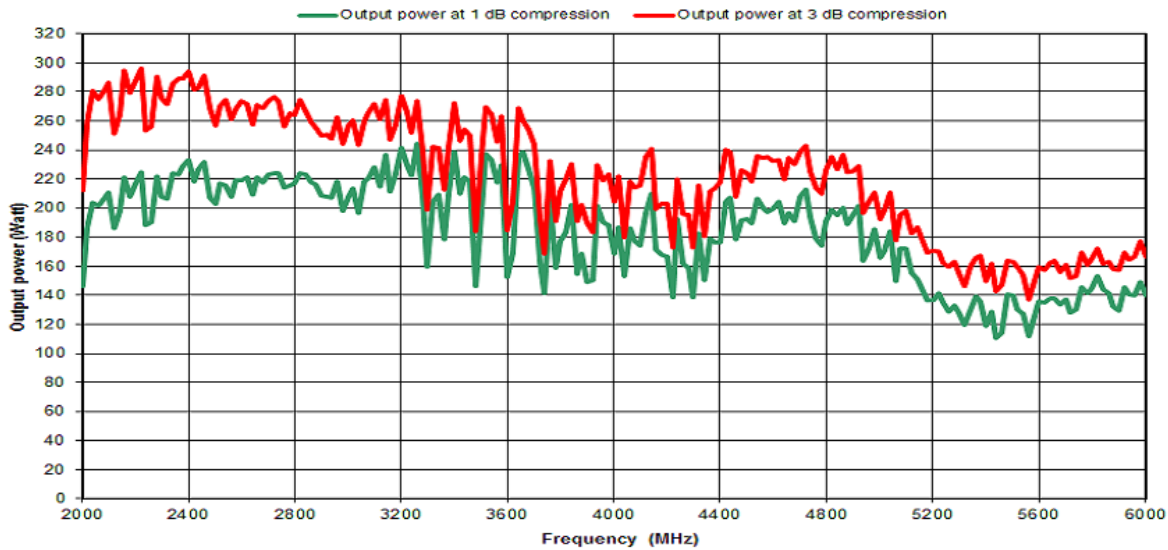

## Specifications

Frequency bandwidth	2 GHz - 6 GHz
Typical output power	180 W
Power at 3 dB compression	140 W min. up to 4 GHz / 120 W min. from 4 GHz to 6 GHz
Power at 1 dB compression	120 W min. up to 4 GHz / 100 W min. from 4 GHz to 6 GHz
Harmonics distortion	H2,H3 < -20 dBc for the output power at 1 dB compression
Class type	Class A
Gain	53 dB
Linear power gain flatness	± 5 dB max
Mismatch tolerance	infinite without damage
Input impedance	50 ohms / VSWR: 2:1 max
Output impedance	50 ohms / VSWR: 2:1 max
Input power	+10 dBm max.
RF input connector	Type N fem. (front or rear panel) – other connector type on request
RF output connector	Type N fem. (front or rear panel) – other connector type on request
Integrated bidirectional power coupler	Coupling factor 53 dB typ
Power coupling connector	Type N fem. (rear panel)
Safety interlock	Connector type BNC
Digital control	Transistors, power supplies and internal temperature
Mismatch protection	Self limitation for reflected power > 150 W
Communication interface	IEEE 488
4 lines digital display	Status, faults, (direct and reverse instantaneous power for DC version)
Ambient operating temperature	0 °C / + 35 °C
Room temperature storage	-20 °C / +70 °C
Cooling	Forced air: 240 l/sec max. (self contained fans)
Power voltage	200-250 VAC, 47-63 Hz, single phase
Rated current	10 A at 230 VAC
Dimensions	600 x 840 x 1050 mm (18U) / 23.6 x 33.1 x 41.3 in (18U)
Weight	160 kg / 353 lb