

SX 250

SX Range (New): 0.6 GHz - 6 GHz / 250 W CW



Prana SX 250

- Class A solid state
- Broadband (instantaneous single band): 0.6 GHz – 6 GHz
- Typical output power : 250 W CW
- Linear output power guaranteed with harmonics :
 - H2, H3 < -15 dBc min. at P1dB of compression min. up to 1 GHz
 - H2, H3 < -20 dBc min. at P1dB of compression above 1 GHz
- Air cooling: self contained fans
- Can operate in full mismatch conditions without damage
- Upgradable to SX 450 DC possible
- Reliable, efficient and robust
- 19" Rack
- 3 years standard warranty

Maintenance

- Amplifier designed for minimal maintenance
 - Easy access to all parts
 - Modular design
 - Repairs with minimum adjustments
- Rapid diagnostic
- Minimal downtime
- Contract for preventive and corrective maintenance available

Applications

- EMC tests
- RF tests and instrumentation
- Radiocommunication
- Measurement and research laboratories

Versions

- SX 250 DC amplifier with:
 - Multicolor LCD display with touch panel
 - Digital control
 - Ethernet, USB, GPIB, RS232 Communication
 - Temperature controlled fans
 - Safety interlock
 - Integrated dual directional coupler
 - display of instantaneous incident and reflected power

SX Range (New)


- SX 40 => 40 W CW
- SX 75 => 75 W CW
- SX 150 => 150 W CW
- SX 250 => 250 W CW
- SX 450 => 450 W CW
- SX 700 => 450 W CW

Extra

- External coupler
- Supply and integration inside a cabinet
- RF Power cable

SX 250

SX Range (New): 0.6 GHz - 6 GHz / 250 W CW

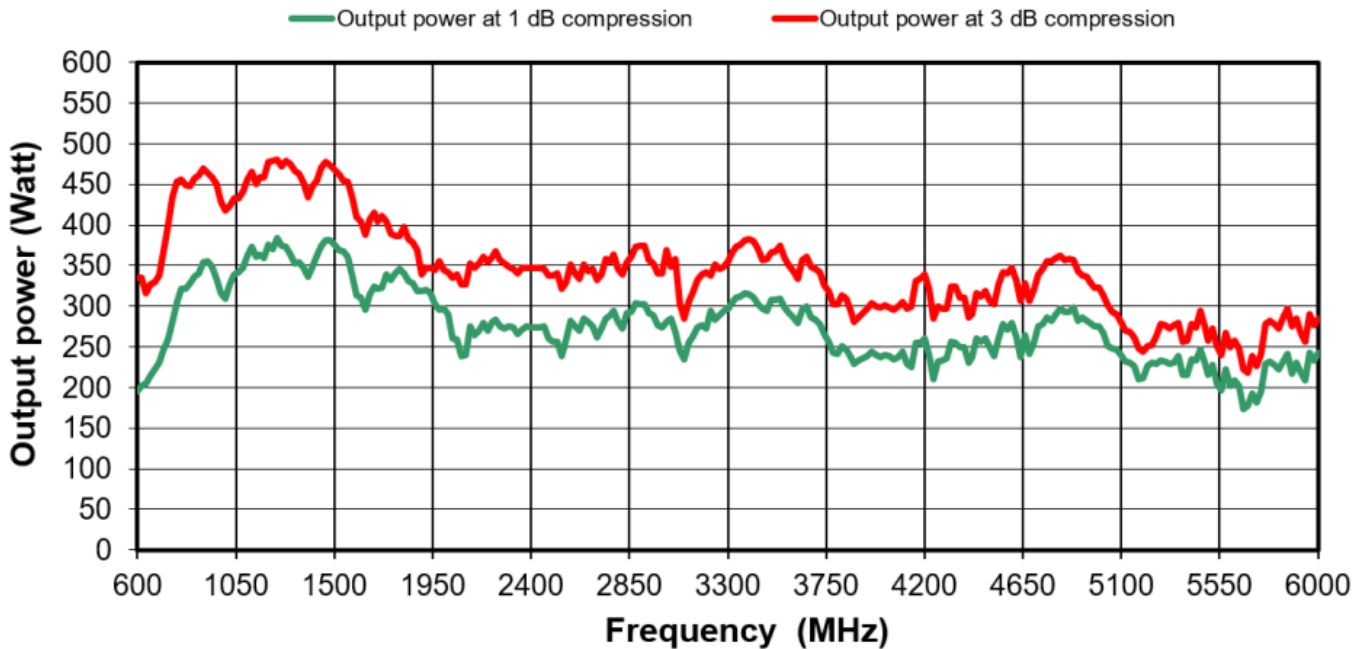

Specifications

Frequency bandwidth	0.6 GHz - 6 GHz
Typical output power	250 W
Minimum power at 3 dB compression	200 W 0.6 - 4 GHz / 180 W 4 - 6 GHz
Minimum power at 1 dB compression	180 W 0.6 - 4 GHz / 160 W 4 - 6 GHz
Harmonics distortion < 1 GHz	H2,H3 : < -15 dBc min at P1dB of compression minimum
Harmonics distortion > 1 GHz	H2,H3 : < -20 dBc min at P1dB of compression
Class type	Class A
Gain	54 dB
Linear power gain flatness	± 5.5 dB max
Mismatch tolerance	infinite without damage
Input impedance	50 ohms / VSWR: 2:1 max
Output impedance	50 ohms / VSWR: 2:1 max
Input power	+10 dBm max.
RF input connector	Type N fem. (front or rear panel) – other connector type on request
RF output connector	Type N fem. (front or rear panel) – other connector type on request
Integrated bidirectional power coupler	Coupling factor 54 dB typ.
Power coupling connector	Type N fem. (front or rear panel)
Safety interlock	Connector type BNC
Digital control	VSWR, Transistors, power supplies, temperatures and fans
Communication interfaces	Ethernet, USB, GPIB, RS232
Color LCD display with touch screen	Status, faults, direct and reverse instantaneous power
Ambient operating temperature	0 °C / + 35 °C
Room temperature storage	-20 °C / +70 °C
Cooling	Forced air with fan speed control: 120 l/sec max. (self-contained fans)
Power voltage	200-250 VAC, 47-63 Hz, single phase
Rated current	12.5 A at 200 VAC / 10.9 A at 230 VAC
Dimensions	640 x 450 x 178 mm (4U) / 25.2 x 17.7 x 7 in (4U)
Weight	35 kg / 77 lb

SX25015MAY2026 - Electrical and Mechanical Specifications subject to change without notice.