

SV 120

SV Range: 0.8 GHz - 3.2 GHz / 120 W CW



Prana SV 120

- Class A solid state
- Broadband (instantaneous single band): 0.8 GHz – 3.2 GHz
- Typical output power : 120 W CW
- Linear output power guaranteed with harmonics < -20 dBc
- Air cooling: self contained fans
- Can operate in full mismatch conditions without damage
- Upgradable to SV 220 possible
- Reliable, efficient and robust
- 19" Rack
- 3 years standard warranty

Maintenance

- Amplifier designed for minimal maintenance
 - Easy access to all parts
 - Modular design
 - Repairs with minimum adjustments
- Rapid diagnostic
- Minimal downtime
- Contract for preventive and corrective maintenance available

Applications

- EMC tests
- RF tests and instrumentation
- Radiocommunication
- Measurement and research laboratories

Versions

- SV 120 D amplifier with:
 - Display
 - Digital control
 - IEEE 488 GPIB Communication
- SV 120 DC : SV 120 D with :
 - Integrated bidirectional coupler
 - display of instantaneous power


SV Range

- SV 28 => 28 W CW
- SV 48 => 48 W CW
- SV 90 => 90 W CW
- SV 120 => 120 W CW
- SV 220 => 220 W CW
- SV 450 => 450 W CW
- SV 1000 => 1000 W CW

Extra

- External coupler
- Supply and integration inside a cabinet
- RF Power cable
- Switching unit

SV120 POWER AMPLIFIER 120W / 800 MHz - 3200 MHz

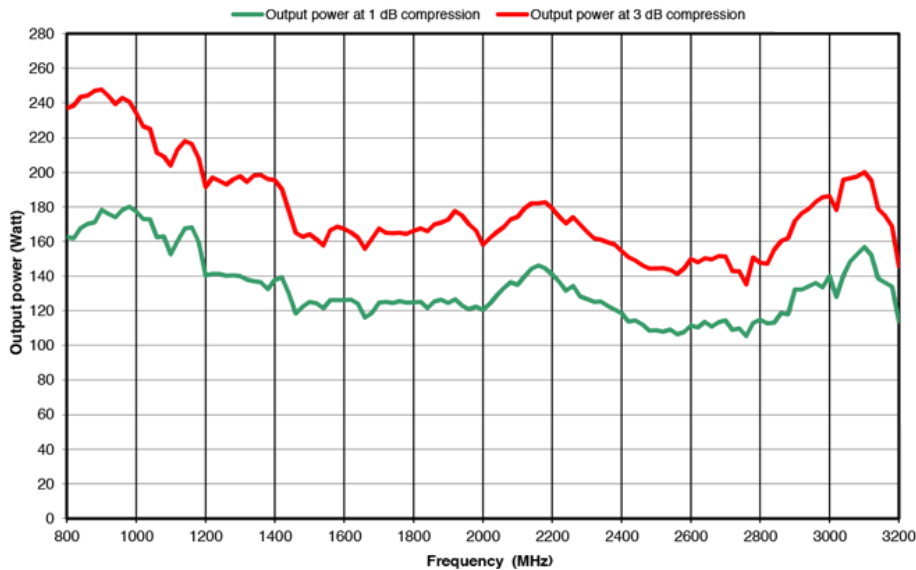

Specifications

Frequency bandwidth	0.8 GHz - 3.2 GHz
Typical output power	120 W
Power at 3 dB compression	120 W min. up to 1.8 GHz / 100 W min. from 1.8 GHz to 3.2 GHz
Power at 1 dB compression	90 W min. up to 1.8 GHz / 70 W min. from 1.8 GHz to 3.2 GHz
Harmonics distortion	H2,H3 < -20 dBc for the output power at 1 dB compression
Class type	Class A
Gain	52 dB
Linear power gain flatness	± 5 dB max
Mismatch tolerance	infinite without damage
Input impedance	50 ohms / VSWR: 2:1 max
Output impedance	50 ohms / VSWR: 2:1 max
Input power	+10 dBm max.
RF input connector	Type N fem. (front or rear panel) – other connector type on request
RF output connector	Type N fem. (front or rear panel) – other connector type on request
Safety interlock	Safety interlock
Digital control	Transistors, power supplies and internal temperature
Communication interface	IEEE 488
4 lines digital display	Status, faults, (direct and reverse instantaneous power for DC version)
Ambient operating temperature	0 °C / + 35 °C
Room temperature storage	-20 °C / +70 °C
Cooling	Forced air: 120 l/sec max. (self contained fans)
Power voltage	200-250 VAC, 47-63 Hz, single phase
Rated current	4.8 A at 230 VAC
Dimensions	640 x 450 x 312 mm (7U) / 25.2 x 17.7 x 12.3 in (7U)
Weight	33 kg / 73 lb

SV 120 DC version :

Integrated bidirectional power coupler	Coupling factor 59 dB typ.
Power coupling connector	Type N fem. (rear panel)
Estimated output power losses due to the coupler	0.3 dB