

DR 75

DR Range: 9 kHz - 400 MHz / 75 W CW



Prana DR 75

- Class A solid state
- Broadband (instantaneous single band): 9 kHz –400 MHz
- Frequency extension between 4 kHz and 9 kHz upon request
- Typical output power : 75 W CW
- Linear output power (1 dB compression) guaranteed with harmonics <-20 dBc:
 - P1dB > 35 W and H<-20 dBc at 9 kHz
 - P1dB > 40 W and H<-20 dBc from 10 kHz to 20 kHz
 - P1dB > 55 W and H<-20 dBc from 20 kHz to 400 MHz
- Air cooling: self contained fans
- Can operate in full mismatch conditions without damage
- Reliable, efficient and robust
- 19" Rack
- 3 years standard warranty

Maintenance

- Amplifier designed for minimal maintenance
 - Easy access to all parts
 - Modular design
 - Repairs with minimum adjustments
- Rapid diagnostic
- Minimal downtime
- Contract for preventive and corrective maintenance available

Applications

- EMC tests
- RF tests and instrumentation
- Radiocommunication
- Measurement and research laboratories

Versions

- DR 75 S : standard amplifier
- DR 75 D amplifier with:
 - Multicolor LCD display with touch panel
 - Digital control
 - IEEE 488 GPIB, Ethernet, USB, RS232 Communications
 - Temperature controlled fans
 - Safety interlock
- DR 75 SC : DR 75 S with
 - Integrated dual directional coupler
- DR 75 DC : DR 75 D with :
 - Integrated dual directional coupler
 - Display of instantaneous incident and reflected power


DR Range

- DR 75 => 75 W CW
- DR 140 => 140 W CW
- DR 290 => 290 W CW
- DR 540 => 540 W CW
- DR 1100 => 1100 W CW
- DR 1800 => 1800 W CW
- DR 3200 => 3200 W CW

Extra

- External coupler
- Supply and integration inside a cabinet
- Bulk Current Injection + Calibration JIG
- RF Power cable
- Switching unit

DR7504MAY2026 - Electrical and Mechanical Specifications subject to change without notice.

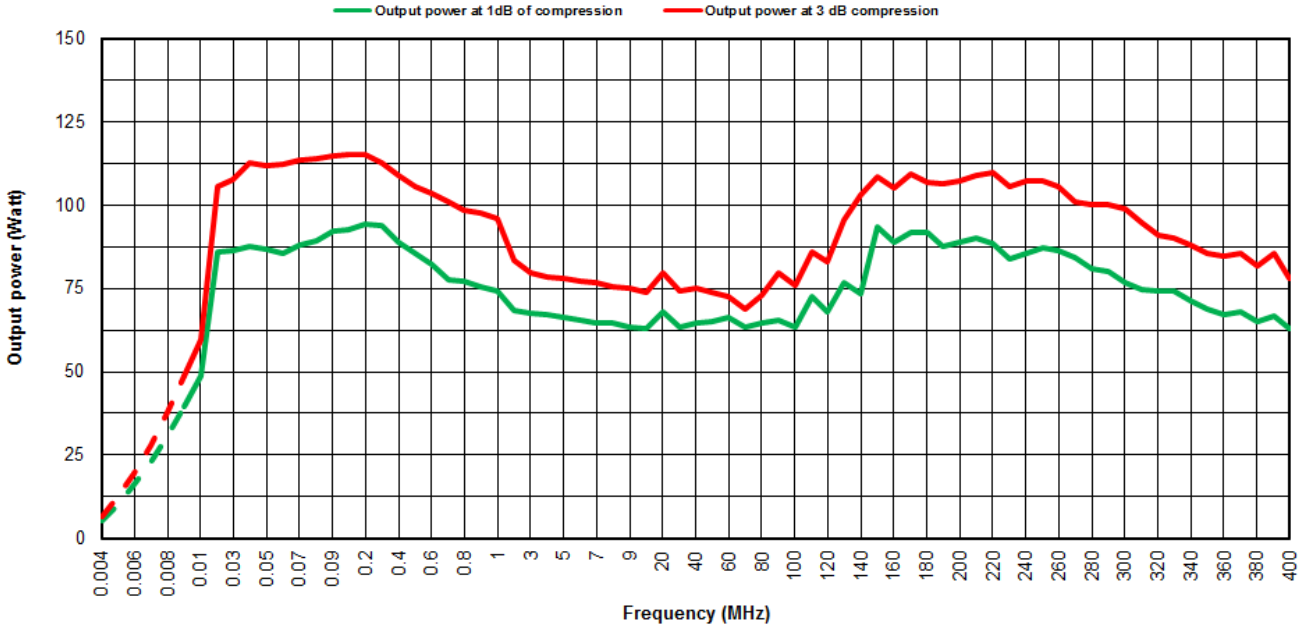

Specifications

Frequency bandwidth	9 kHz - 400 MHz
Typical output power	75 W
Power at 3 dB compression	40W min at 9 kHz/ 50W min [10 - 20] kHz/ 60W min [20 k - 400 M] Hz
Power at 1 dB compression	35W min at 9 kHz/ 40W min [10 - 20] kHz/ 55W min from [20 k - 400 M] Hz
Harmonics distortion	H2,H3 < -20 dBc for the output power at 1 dB compression limit
Class	Type class A
Gain	48 dB
Linear power gain flatness	± 2.5 dB max
Mismatch tolerance	Infinite without damage
Input impedance	50 ohms / VSWR: 2:1max
Output impedance	50 ohms / VSWR: 2:1max
Input power	+10 dBm max.
RF input connector	Type N fem. (front or rear panel) – other connector type on request
RF output connector	Type N fem. (front or rear panel) – other connector type on request
Ambient operating temperature	0 °C / + 35 °C
Room temperature storage	-20 °C / +70 °C
Cooling	Forced air with fan speed control (D version): < 20 l/s (self contained fans)
Power voltage	90-250 VAC, 47-63 Hz, single phase
Rated current	4.1 A at 110 VAC / 1.9 A at 230 VAC
Dimensions	640 x 450 x 89 mm (2U) / 25.2 x 17.7 x 3.5 in (2U)
Weight	10 kg / 26.5 lb

DR 75 D version :

Safety interlock	Connector type BNC
Digital control	Transistors, power supplies, temperatures and fans
Communication interface	Ethernet, USB, GPIB, RS232
Color LCD Display with touch screen	Status, faults, (direct and reverse instantaneous power for DC version)

DR 75 SC and N-DR 75 DC versions :

Integrated bidirectional power coupler	Coupling factor 40 dB typ. (SC version) / 49 dB typ. (DC version)
Power coupling connector	Type N fem. (front or rear panel)
Estimated output power losses due to the coupler	0.3 dB

DR 75 SR version :

Dimensions	442 x 430 x 125 mm (3U) / 17.4 x 16.92 x 4.92 in (3U)
------------	-------------------------------------------------------